Dotix

DT-7422AE2L

Bullet Analog Camera

Features

- 1/2.9” CMOS
- AHD/TVI/CVI/CVBS/AGC
- Digital WDR/DNR
- OSD COC Control
- DC12V

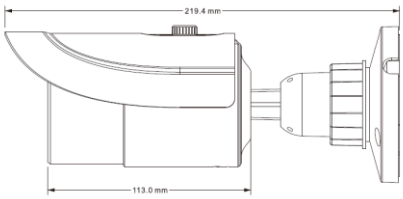



Specifications

Image Sensor	1/2.9” CMOS
Resolution	2M
Image Size	1920x1080
Video Output	AHD/TVI/CVI/DVBA
Image System	NTSC (PAL Optional)
Electronic Shutter	Auto;1/50s~1/100000s(PAL);1/60s~1/100000s(NTSC)
IR Distance	20-30m
Frame Rate	30FPS(60Hz), 25FPS(50Hz)
Min. Illumination	0lux (IR ON)
Lens	2.8-12mm
Lens Mount	D14
S/N Ratio	≥52dB（AGC OFF）
Ingress Protection	IP66
Function Control	OSD (COC Control)
Day & Night	ICR
Functions	WDR, NDR, AGC, AWB, BLC, Front Light Compensation, Sharpness, Mirror, Smart IR, Image Setting Auto, Defect Correction, Angle Adjustment Any angle
Languages	Chinese/English
Power Supply	DC12V（±10%)
Power Consunmption	Day：<65 mA；Night：<290 mA
Wokring Environment	-20℃ ~ 50℃，10% ~ 90% humidity
Dimension (mm)	Φ87mm×219mm